


Crankshaft End Play

Special Tool(s)

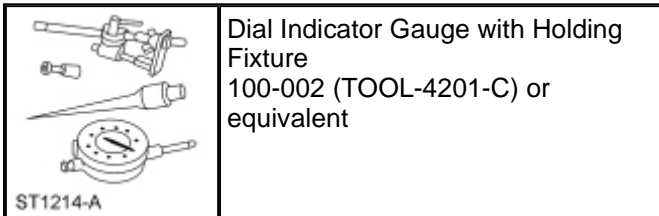

NOTE: Refer to the appropriate Section 303-01 for the specification.

1. Install the Dial Indicator Gauge with Holding Fixture.
2. Position the crankshaft to the rear of the cylinder block.
3. Zero the Dial Indicator Gauge.
4. Move the crankshaft to the front of the cylinder block. Note and record the crankshaft end play.

