
## **Antenna Lead-In Cable**

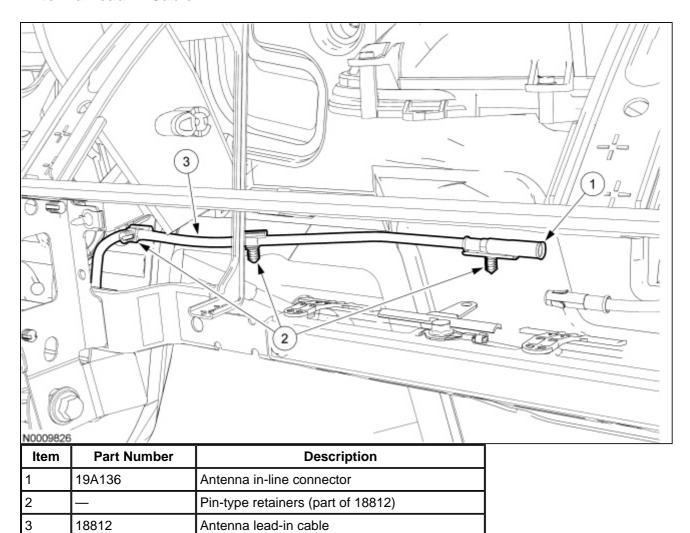

## **Removal and Installation**

- 1. Remove the Audio Control Module (ACM). For additional information, refer to <u>Audio Control Module</u> (ACM) in this section.
- 2. Lower the glove compartment door.
- 3. Disconnect the antenna in-line connector.
- 4. Disconnect the pin-type retainers and remove the antenna lead-in cable.
- 5. To install, reverse the removal procedure.