


### Subwoofer Amplifier — Luggage Compartment

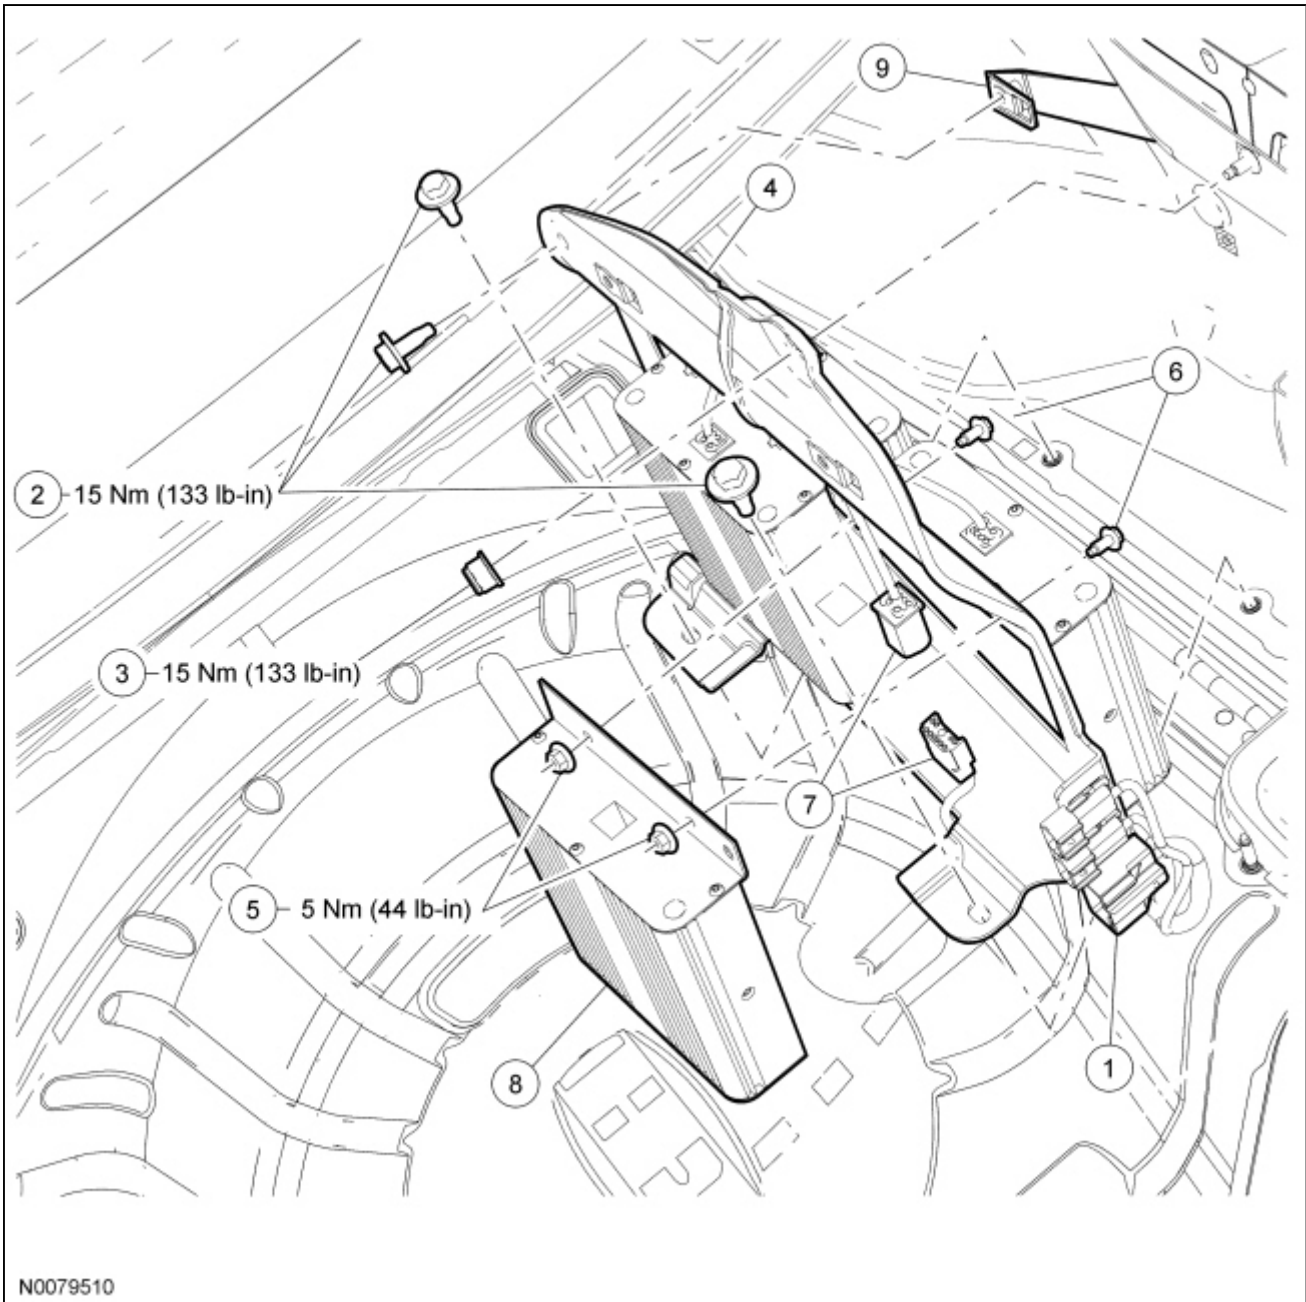

| Item | Part Number | Description  |
|------|-------------|--|
| 1    | —           | Luggage compartment subwoofer amplifier jumper harness electrical connector (part of 14A005) |
| 2    | W505433     | Luggage compartment subwoofer amplifier rack bolts (3 required)                              |
| 3    | W520212     | Luggage compartment subwoofer amplifier rack nut   |
| 4    | 18T806      | Luggage compartment subwoofer amplifier rack   |
| 5    | N621903     | Luggage compartment subwoofer amplifier nuts (4 required per pair of amplifiers)             |
| 6    | N606663     | Luggage compartment subwoofer amplifier bolts (4 required per pair of amplifiers)            |

|   |        |   |
|---|--------|---|
| 7 | 19B113 | Luggage compartment subwoofer amplifier electrical connectors |
| 8 | 18C088 | Luggage compartment subwoofer amplifiers                      |
| 9 | 19B187 | Attachment bracket  |

### Removal and Installation

1. Remove the speaker enclosure. For additional information, refer to [Speaker Enclosure](#) in this section.
  2. Disconnect the luggage compartment subwoofer amplifier jumper harness electrical connector.
  3. Remove the 3 luggage compartment subwoofer amplifier rack bolts.
    - To install, tighten to 15 Nm (133 lb-in).
  4. Remove the nut and the luggage compartment subwoofer amplifier rack.
    - To install, tighten to 15 Nm (133 lb-in).
  5. Remove the 4 nuts and bolts and the pair of luggage compartment subwoofer amplifiers.
    - Disconnect the electrical connectors.
    - To install, tighten to 5 Nm (44 lb-in).
  6. To install, reverse the removal procedure.
-