


Fender

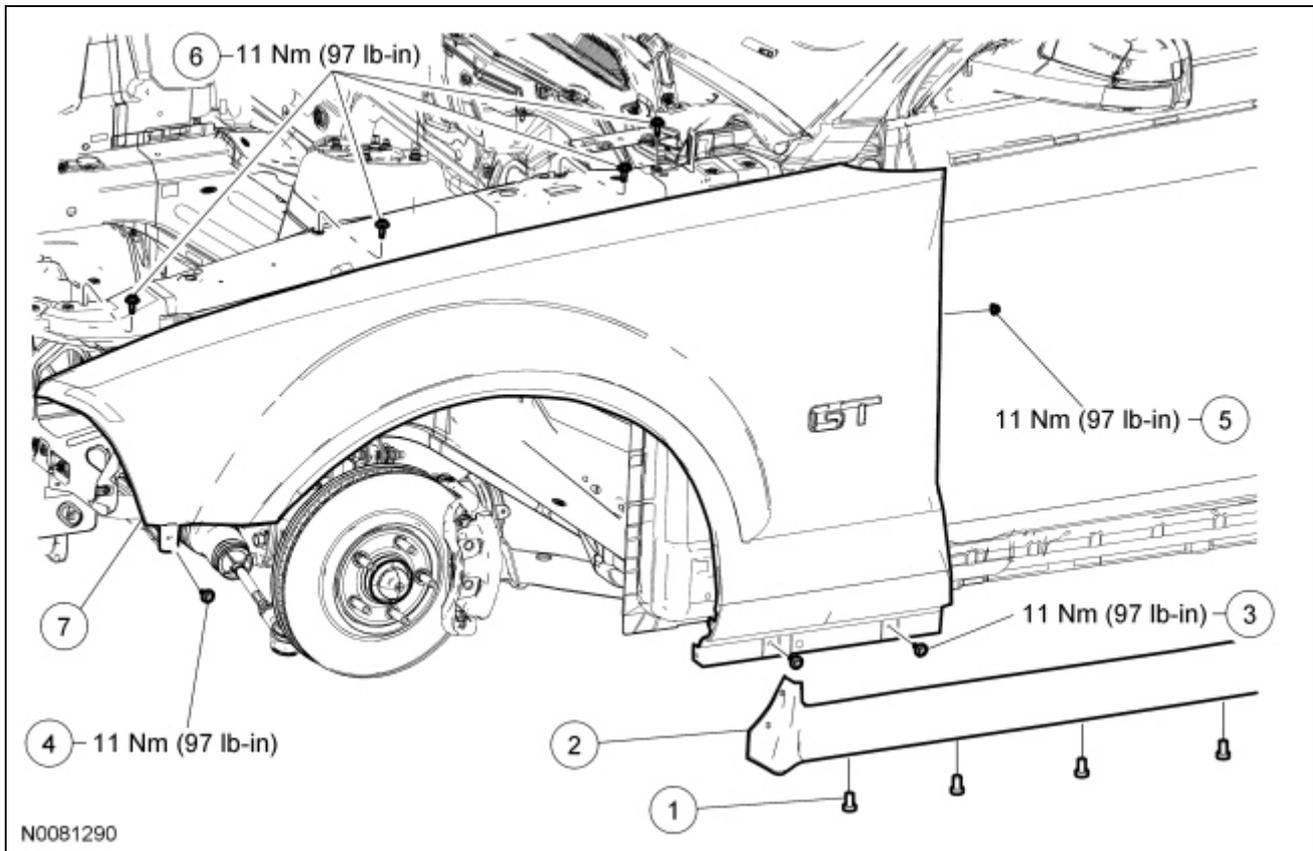


Item	Part Number	Description
1	39001B	Rocker panel pin-type retainer (4 required)
2	6310155	Rocker panel
3	W505421	Fender bolt (lower) (2 required)
4	W505421	Fender bolt
5	W711652	Fender support nut
6	W505421	Fender bolts (top) (4 required)
7	16015	Fender

Removal and Installation

Both fenders

1. Remove the front bumper cover. For additional information, refer to [Section 501-19](#).
2. Remove the fender splash shield. For additional information, refer to [Fender Splash Shield](#) in this section.
3. Remove the 4 front rocker panel pin-type retainers and position the rocker panel aside.
4. Remove the 2 lower fender bolts.
 - To install, tighten to 11 Nm (97 lb-in).
5. Remove the fender bolt.
6. Remove the fender support nut through the door opening.

- To install, tighten to 11 Nm (97 lb-in).

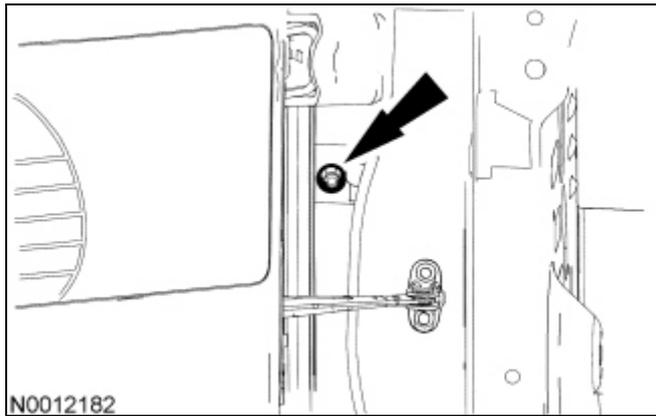

Right fender

7. Disconnect the antenna lead-in cable. For additional information, refer to [Section 415-00](#).
8. Disconnect the hood ajar switch.

Both fenders

9. Remove the 4 top fender bolts and the fender.
 - To install, tighten to 11 Nm (97 lb-in).
 10. To install, reverse the removal procedure.
-