

## Bumper Cover — Front

### Removal and Installation

#### Base vehicle and GT


1. Remove the 6 pin-type retainers and the upper radiator sight shield.

#### Shelby GT 500

2. Remove the 8 pin-type retainers and the upper radiator sight shield.

#### All vehicles

3. Remove the 2 upper front bumper cover bolts.
4. Remove the 6 front fender splash shield-to-front bumper cover screws.
5. If equipped, remove the 10 lower air deflector bolts.
  - To install, tighten to 2 Nm (18 lb-in).
6. Position the front splash shield aside and remove the 4 front bumper cover-to- reinforcement nuts.
  - To install, tighten to 5 Nm (44 lb-in).

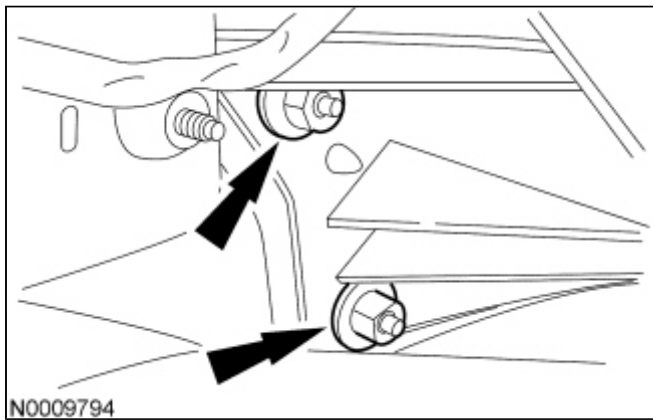

7. If equipped, disconnect the 2 fog lamp electrical connectors.
  8. Disconnect the 4 side marker lamp electrical connectors and remove the front bumper cover.
  9. To install, reverse the removal procedure.
-

