


Safety Belt Twisted at the Safety Belt Guide

NOTE: These procedures apply to both wire-formed and stamped D-ring designs.

1. Grasp the safety belt webbing at the D-ring and fold the twisted portion of the belt webbing over itself.

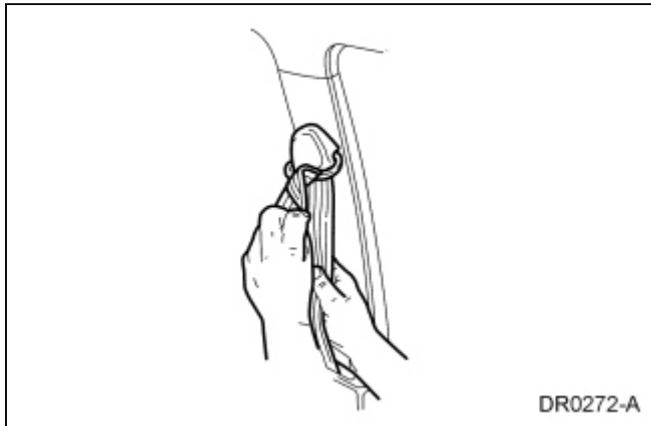

2. Feed the folded portion of the safety belt webbing through the safety belt guide (D-ring) to remove the twist from the belt webbing.

