


Connector: C294A

Description:
HVAC MODULE

Harness:
14401

Base Part #:
19980

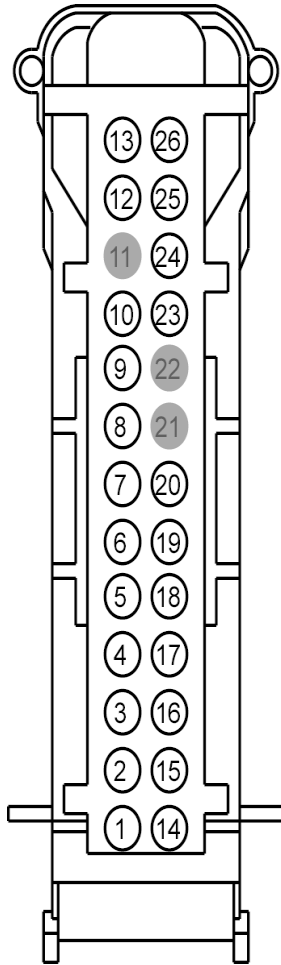

Pin	Circuit	Gauge	Circuit Function	Qualifier
1	1205 (BK)	22	Ground	
2	1425 (GY-WH)	22	Illumination, Power	
3	1397 (GY-RD)	22	A/C demand signal	
4	1427 (TN-LB)	22	Indicator, Rear window defrost, control	
5	436 (RD-LG)	22	Reference voltage	
6	1375 (PK-YE)	22	Blend door actuator +/-	
7	1376 (BK-LB)	22	Blend door actuator +/-	
8	1116 (DG)	22	Recirculation door motor +/-	
9	1117 (LG)	22	Recirculation door motor +/-	
10	1426 (PK)	22	Rear window defrost On/Off signal	
11	*	*	not used	
12	581 (RD)	22	Driver heated seat relay control	
13	2119 (DG-VT)	22	Passenger heated seat relay control	
14	1812 (BN-WH)	22	Voltage supplied in Start and Run (overload protected)	
15	438 (RD-WH)	22	Signal return	
16	435 (YE-LB)	22	Floor mode actuator signal	
17	1982 (LB-BK)	22	Defrost mode actuator signal	
18	437 (YE-LG)	22	Blend door actuator signal	
19	1128 (GY-LB)	22	Floor mode actuator +/-	
20	1129 (BN-WH)	22	Floor mode actuator +/-	
21	*	*	not used	
22	*	*	not used	
23	364 (BK-LG)	22	Blower motor relay control	
24	1136 (RD-WH)	22	Defrost mode actuator +/-	
25	1137 (YE-LG)	22	Defrost mode actuator +/-	
26	1566 (RD-YE)	22	Voltage supplied at all times (overload protected)	