


Connector: C2280A Description: SMART JUNCTION BOX (SJB)

Harness: 14401

Base Part #: 15604

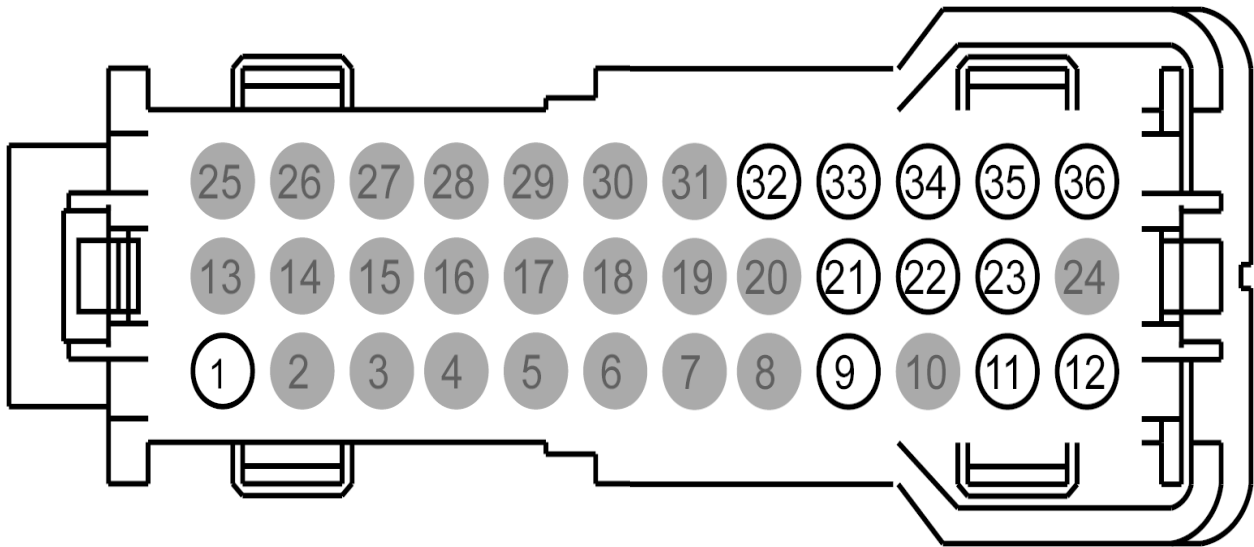

Pin	Circuit	Gauge	Circuit Function	Qualifier
1	1205 (BK)	18	Ground	
2	*	*	not used	
3	*	*	not used	
4	*	*	not used	
5	*	*	not used	
6	*	*	not used	
7	*	*	not used	
8	*	*	not used	
9	1266 (RD-YE)	22	Voltage supplied in Start and Run (overload protected)	
10	*	*	not used	
11	1002 (BK-PK)	18	Voltage in Run or Accessory (overload protected)	
12	1522 (DG)	18	Voltage supplied in Start (overload protected)	
13	*	*	not used	
14	*	*	not used	
15	*	*	not used	
16	*	*	not used	
17	*	*	not used	
18	*	*	not used	
19	*	*	not used	
20	*	*	not used	
21	1566 (RD-YE)	22	Voltage supplied at all times (overload protected)	
22	489 (PK-BK)	22	Voltage supplied in Start and Run (overload protected)	
23	1850 (YE)	22	Voltage supplied in Start and Run (overload protected)	
24	*	*	not used	
25	*	*	not used	
26	*	*	not used	
27	*	*	not used	
28	*	*	not used	
29	*	*	not used	
30	*	*	not used	
31	*	*	not used	
32	1001 (WH-YE)	22	Voltage supplied at all times (overload protected)	
32	1047 (LG-RD)	22	Voltage supplied at all times (overload protected)	
33	1812 (BN-WH)	22	Voltage supplied in run (overload protected)	
34	1000 (RD-BK)	22	Voltage supplied in Start (overload protected)	
35	937 (RD-WH)	20	Voltage supplied in Start and Run (overload protected)	
36	1044 (WH-YE)	18	Voltage supplied in Start and Run (overload protected)	