


## Oil Pump Screen and Pickup Tube

### Material

Item	Specification
Motorcraft® SAE 5W-20 Premium Synthetic Blend Motor Oil XO-5W20-QSP (US); Motorcraft® SAE 5W-20 Super Premium Motor Oil CXO-5W20-LSP12 (Canada); or equivalent	WSS-M2C930-A

### Removal

1. Remove the oil pan. For additional information, refer to [Engine Lubrication Components — Exploded View](#) and [Oil Pan](#) in this section.
2. Remove the bolts and the oil pump screen and pickup tube.

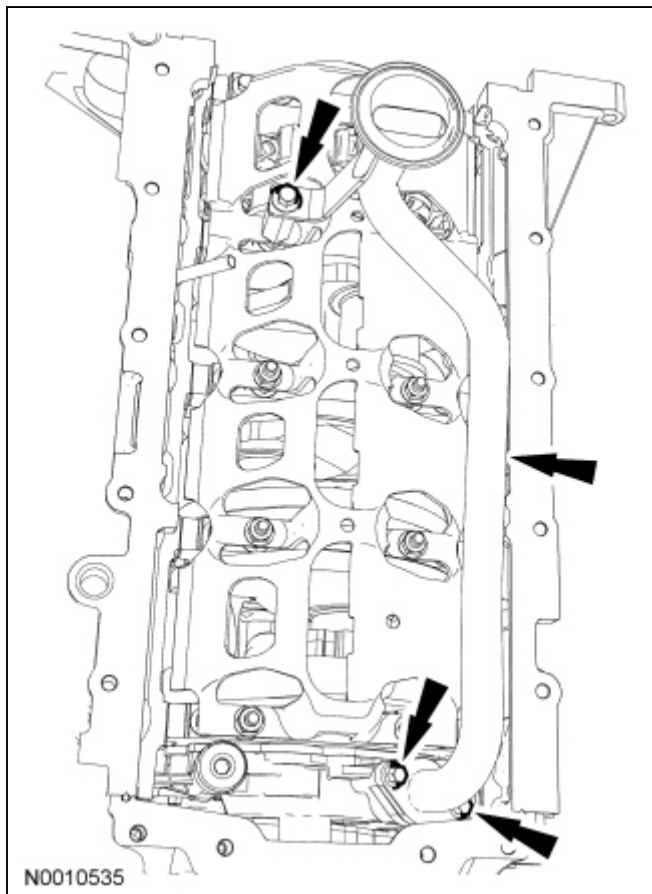


### Installation

1. **NOTICE:** Make sure the O-ring seal is in place and not damaged. A missing or damaged O-ring seal can cause foam in the lubrication system, low oil pressure and severe engine damage.

**NOTE:** Clean and inspect the mating surfaces and install a new O-ring seal. Lubricate the O-ring seal with clean engine oil prior to installation.

Position the oil pump screen and pickup tube and install the bolts.

- Tighten the oil pump screen and pickup tube-to-oil pump bolts to 10 Nm (89 lb-in).
- Tighten the oil pump screen and pickup tube-to-spacer bolt to 25 Nm (18 lb-ft).

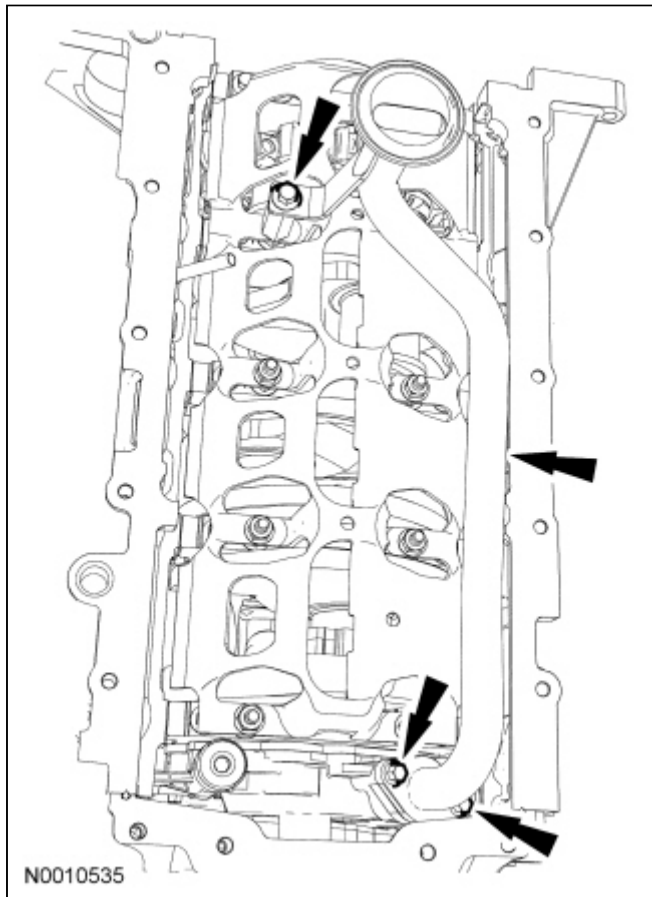

2. Install the oil pan. For additional information, refer to [Engine Lubrication Components — Exploded View](#) and [Oil Pan](#) in this section.
-